

TRANSMITTAL LETTER TO THE UNITED STATES

MAY-0016

DESIGNATED/ELECTED OFFICE (DO/EO/US)

U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR

CONCERNING A FILING UNDER 35 U.S.C. 371

10/009550

INTERNATIONAL APPLICATION NO.

PCT/EP00/03923

INTERNATIONAL FILING DATE

May 2, 2000

PRIORITY DATE CLAIMED

May 5, 1999

TITLE OF INVENTION

INJECTION MOLDING MACHINE FOR PROCESSING PLASTICS

APPLICANT(S) FOR DO/EO/US

KARL HEHL

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☒ This is an express request to begin national examination procedures (35 U.S.C. 371(f)). The submission must include items (5), (6), (9) and (24) indicated below.
 - ☐ The US has been elected by the expiration of 19 months from the priority date (Article 31).
 - ☒ A copy of the International Application as filed (35 U.S.C. 371 (c) (2))
 - a. ☒ is attached hereto (required only if not communicated by the International Bureau).
 - b. ☐ has been communicated by the International Bureau.
 - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
 - ☒ An English language translation of the International Application as filed (35 U.S.C. 371(c)(2)).
 - a. ☒ is attached hereto.
 - b. ☐ has been previously submitted under 35 U.S.C. 154(d)(4).
 - ☐ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371 (c)(3))
 - a. ☐ are attached hereto (required only if not communicated by the International Bureau).
 - b. ☐ have been communicated by the International Bureau.
 - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
 - d. ☐ have not been made and will not be made.
8. ☐ An English language translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
9. ☒ An oath or declaration of the inventor(s) (35 U.S.C. 371 (c)(4)).
10. ☐ An English language translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371 (c)(5)).
11. ☐ A copy of the International Preliminary Examination Report (PCT/IPEA/409).
12. ☒ A copy of the International Search Report (PCT/ISA/210).

Items 13 to 20 below concern document(s) or information included:

13. ☒ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
14. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
15. ☒ A **FIRST** preliminary amendment.
16. ☐ A **SECOND** or **SUBSEQUENT** preliminary amendment.
17. ☐ A substitute specification.
18. ☐ A change of power of attorney and/or address letter.
19. ☐ A computer-readable form of the sequence listing in accordance with PCT Rule 13ter.2 and 35 U.S.C. 1.821 - 1.825.
20. ☐ A second copy of the published international application under 35 U.S.C. 154(d)(4).
21. ☐ A second copy of the English language translation of the international application under 35 U.S.C. 154(d)(4).
22. ☒ Certificate of Mailing by Express Mail
23. ☐ Other items or information:

"Express Mail" mailing label number EL9140995705Date of Deposit November 5, 2001

I hereby certify that this paper or fee is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to the Commissioner of Patents and Trademarks, Washington, D.C. 20231.

10/009550

PCT/EP00/03923

MAY-0016

24. The following fees are submitted:

BASIC NATIONAL FEE (37 CFR 1.492 (a) (1) - (5)) :

- ☐ Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO \$1040.00
- ☒ International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO \$890.00
- ☐ International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO \$740.00
- ☐ International preliminary examination fee (37 CFR 1.482) paid to USPTO but all claims did not satisfy provisions of PCT Article 33(1)-(4) \$710.00
- ☐ International preliminary examination fee (37 CFR 1.482) paid to USPTO and all claims satisfied provisions of PCT Article 33(1)-(4) \$100.00

ENTER APPROPRIATE BASIC FEE AMOUNT =**CALCULATIONS PTO USE ONLY**

\$890.00

Surcharge of \$130.00 for furnishing the oath or declaration later than ☐ 20 ☐ 30 months from the earliest claimed priority date (37 CFR 1.492 (e)).

\$0.00

CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE
Total claims	17 - 20 =	0	x \$18.00
Independent claims	1 - 3 =	0	x \$84.00

\$0.00

\$0.00

Multiple Dependent Claims (check if applicable). ☐

\$0.00

TOTAL OF ABOVE CALCULATIONS =

\$890.00

Applicant claims small entity status. See 37 CFR 1.27). The fees indicated above are reduced by 1/2.

\$0.00

SUBTOTAL =

\$890.00

Processing fee of \$130.00 for furnishing the English translation later than ☐ 20 ☐ 30 months from the earliest claimed priority date (37 CFR 1.492 (f)).

\$0.00

TOTAL NATIONAL FEE =

\$890.00

Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31) (check if applicable). ☐

\$0.00

TOTAL FEES ENCLOSED =

\$890.00

Amount to be:	\$
refunded	
charged	\$

- a. ☒ A check in the amount of \$890.00 to cover the above fees is enclosed.
- b. ☐ Please charge my Deposit Account No. _____ in the amount of _____ to cover the above fees. A duplicate copy of this sheet is enclosed.
- c. ☒ The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. 06-1130. A duplicate copy of this sheet is enclosed.
- d. ☐ Fees are to be charged to a credit card. **WARNING:** Information on this form may become public. **Credit card information should not be included on this form.** Provide credit card information and authorization on PTO-2038.

NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.

SEND ALL CORRESPONDENCE TO:

Daniel F. Drexler
CANTOR COLBURN LLP
55 Griffin Road South
Bloomfield, CT 06002
Telephone: 860-286-2929
Customer No. 23413

SIGNATURE

Daniel F. Drexler

NAME

47,535

REGISTRATION NUMBER

November 5, 2001

DATE

Express Mail Label EL914109957US

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

IN RE APPLICATION OF: KARL HEHL

FOR: INJECTION MOLDING MACHINE FOR PROCESSING PLASTICS
MATERIALS

DOCKET NO.: MAY-0016

PRELIMINARY AMENDMENT

The Assistant Commissioner of
Patents and Trademarks
Washington, DC 20231

Sir:

Prior to the Examiner acting in the above-referenced application, please
preliminary amend the specification and claims as follows:

IN THE SPECIFICATION:

Please delete the heading "DESCRIPTION" at page 1 beneath the title of the invention.

Please delete at page 1 the heading "Reference to related applications" and the paragraph
thereunder.

Please replace the second paragraph beginning at line 13 on page 1 with the following
rewritten clean version:

--The invention relates to an injection molding machine and, more particularly, to
an injection molding machine for processing plastics materials and other plasticisable
compounds including at least partially electrically operated driving units to operate the
machine.--

"Express Mail" mailing label number EL 914109957US
Date of Deposit November 5, 2001

I hereby certify that this paper or fee is being deposited
with the United States Postal Service "Express Mail
Post Office to Addressee" service under 37 CFR 1.10
on the date indicated above and is addressed to the
Commissioner of Patents and Trademarks, Washington,
D.C. 20231.

Jenn Z n Matsen
(Typed or printed name of person mailing paper or fee)

[Signature]
(Signature of person mailing paper or fee)

Please replace the heading "Prior Art" and the paragraph thereunder on page 1 with the following rewritten clean version:

--Description of the Related Art

A linear motor, which is used as the driving unit and is provided with a rotor and stator, is known for plastics material molding machines from DE-T2 37 82 817, which corresponds to EP 0 280 743 B1, and JP-A 63-1516, rotor and stator having cylindrical surfaces which are in operative connection with one another. These surfaces permit the magnetic face, which is needed for the required advancing forces, to be suitably incorporated in the drive axis. If stator windings are symmetrically disposed in accordance with DE-A 44 45 283, the relatively high bearing forces caused by the magnetism are mutually excluded. However, even there, mention is constantly made in the description of only one primary part and one secondary part, which parts co-operate accordingly with one another. If Figure 3 there is additionally considered, it becomes apparent that the internally situated pipe is merely a carrier pipe which, just like the externally situated pipe, is neither a stator nor a rotor. When such a linear motor is used, there is a simultaneous saving in the complex converting means, which are susceptible to wear and serve to convert a rotary movement into a linear movement, such as, for example, a transmission mechanism, a spindle, levers and toothed rods (cf. also EP-A 744 815), but the forces, which are required for a plastics material injection molding machine, cannot yet be applied therefore to a sufficient extent.--

Please replace the third and fourth paragraphs beginning at line 20 on page 2 with the following rewritten version:

--The present invention provides a linear motor for an injection molding machine, which motor can also apply the advancing forces required for an injection molding machine.

An injection molding machine for processing plastics materials and plasticisable materials of the present invention includes an injection molding unit and a mould closing unit, which are operated at least partially by an electric driving unit including at least one linear motor, which has a rotor with magnets, disposed along a first cylindrical surface,

and a stator with stator windings disposed along a second cylindrical surface, the first and second cylindrical surfaces of stator and rotor being concentrically disposed, and the stator windings being substantially symmetrical relative to an axis of movement of the linear motor. Additionally, a plurality of identically acting first surfaces are stacked with a corresponding number of identically acting second surfaces, the first and/or second surfaces each being operable jointly in operative connection.--

Please replace the second paragraph on page 3 with the following rewritten version:

--Cooling ducts may be disposed in the cylindrical walls of the stator, so that the heating, caused by the current, can be reliably dissipated. The cooling medium used therefor can, at the same time, be used to control the temperature of other component parts in the injection molding machine.--

Please delete the third paragraph at page 3, that is, the paragraph immediately before the section "Brief Description of the Figures".

Please delete page 11 in its entirety.

IN THE CLAIMS:

Please replace claims 1-11 with the following re-written versions.

1. (Amended) Injection molding machine for processing plastics materials and plasticisable materials, comprising: an injection molding unit and a mould closing unit, which are operated at least partially by an electric driving unit including at least one linear motor, which has a rotor with magnets, disposed along a first cylindrical surface, and a stator with stator windings disposed along a second cylindrical surface, the first and second cylindrical surfaces being concentrically disposed, and the stator windings being substantially symmetrical relative to an axis of movement of the linear motor, wherein a plurality of identically acting first surfaces are stacked with a corresponding number of

identically acting second surfaces, at least one of the first and second surfaces being operable jointly in operative connection.

2. (Amended) Injection molding machine according to claim 1, wherein the magnets are separately excited coils with an iron core.

3. (Amended) Injection molding machine according to claim 1, wherein the electric driving unit is a regulated servo driving unit.

4. (Amended) Injection molding machine according to claim 1, wherein the identically acting first or second surfaces are an outside and inside of a first cylinder, and wherein the identically acting first or second surfaces are so disposed on concentric second and third cylinders that an internal surface of the second cylinder cooperates with the outside of the first cylinder, and an external surface of the third cylinder co-operates with the inside of the first cylinder.

5. (Amended) Injection molding machine according to claim 1, wherein the linear motor is cylindrical and is overlapped on the outside by a cylinder, which guides faces of the rotor and the stator, which are moved towards one another, along a separate bearing face by means of at least one mounting.

6. (Amended) Injection molding machine according to claim 1, wherein the stator windings are divided along the axis of movement into a plurality of separate electrical switching zones.

7. (Amended) Injection molding machine according to claim 1, further comprising cooling ducts, which lie behind or adjacent the stator windings when viewed from the magnets, are associated with said stator windings, wherein a temperature of the cooling ducts is controlled by means of a cooling medium.

8. (Amended) Injection molding machine according to claim 1, wherein the electric driving unit is a closing mechanism for moving a movable mould carrier towards a stationary mould carrier and away from said stationary carrier and for applying a closing force.

9. (Amended) Injection molding machine according to claim 4, wherein the linear motor is employed as a closing mechanism, and wherein there is a space in an interior of the third cylinder to accommodate an ejector unit.

10. (Amended) Injection molding machine according to claim 1, wherein the linear motor is employed as an injection means, a covering of the cylindrical surfaces, increasing during displacement of a feeding means to an injection mould.

11. (Amended) Injection molding machine according to claim 1, wherein the linear motor is employed as a closing mechanism, a covering of the cylindrical surfaces increasing as parts of an injection mould approach one another.

Please insert the following newly added claims 12-17.

12. (Newly Added) Injection molding machine according to claim 1, wherein the electric driving unit is an arrangement for applying a closing force.

13. (Newly Added) Injection molding machine according to claim 1, wherein the electric driving unit is a driving unit for fitting a nozzle onto an injection mould.

14. (Newly Added) Injection molding machine according to claim 1, wherein the electric driving unit is an injection means for axially moving a feeding means.

15. (Newly Added) Injection molding machine according to claim 1, wherein the electric driving unit is an ejector unit.

16. (Newly Added) Injection molding machine according to claim 1, wherein the electric driving unit is a core pulling unit on an injection mould.

17. (Newly Added) Injection molding machine according to claim 1, wherein the electric driving unit is a driving unit for a closure nozzle.

REMARKS

Applicant requests entry of the above-identified amendments which conform the claims and the specification to U.S. practice. No new matter is being introduced by this Amendment as antecedent support is set forth in the specification and the original claims.

Prosecution on the merits is respectfully requested.

The Examiner is invited to contact Applicant's Attorneys directly at the below-listed telephone number regarding this preliminary amendment or otherwise with respect to the present application.

If there are any charges with respect to this Amendment or otherwise, please charge them to Deposit Account No. 06-1130 maintained by Applicant's attorneys.

Respectfully submitted,

KARL HEHL

CANTOR COLBURN LLP

Applicant's Attorney

By: 

Daniel F. Drexler

Registration No. 47,535

Customer No. 23413

Date: Nov. 5, 2001

Tel: 860-286-2929

Version with Markings to Show Changes Made

IN THE SPECIFICATION

The second paragraph on page 1 is amended as follows:

“The invention relates to an injection molding machine and, more particularly, to an injection molding machine for processing plastics materials and other plasticisable compounds[, wherein] including at least partially electrically operated driving units [are used] to operate [said] the machine[, in accordance with the preamble of claim 1].”

The third paragraph on page 1 is amended as follows:

“A linear motor, which is used as the driving unit and is provided with a rotor and stator, is known for plastics material molding machines from DE-T2 37 82 817, which [forms the basis for the preamble of claim 1 and] corresponds to EP 0 280 743 B1, and JP-A 63-1516, [said] rotor and stator having cylindrical surfaces which are in operative connection with one another. These surfaces permit the magnetic face, which is needed for the required advancing forces, to be suitably incorporated in the drive axis. If [the] stator windings are symmetrically disposed in accordance with DE-A 44 45 283, the relatively high bearing forces caused by the magnetism are mutually excluded. However, even there, mention is constantly made in the description of only one primary part and one secondary part, which parts co-operate accordingly with one another. If Figure 3 there is additionally considered, it becomes apparent that the internally situated pipe is merely a carrier pipe which, just like the externally situated pipe, is neither a stator nor a rotor. When such a linear motor is used, there is a simultaneous saving in the complex converting means, which are susceptible to wear and serve to convert a rotary movement into a linear movement, such as, for example, a transmission mechanism, a spindle, levers and toothed rods (cf. also EP-A 744 815), but the forces, which are required for a plastics material injection molding machine, cannot yet be applied therefore to a sufficient extent.”

The third and fourth paragraphs on page 2 are amended as follows:

“[Based on this prior art it is the object of t]The present invention [to] provides a linear motor for an injection molding machine, which motor can also apply the advancing forces required for an injection molding machine.

[This object is achieved by a]An injection molding machine [having the features of claim 1] for processing plastics materials and plasticisable materials of the present invention includes an injection molding unit and a mould closing unit, which are operated at least partially by an electric driving unit including at least one linear motor, which has a rotor with magnets, disposed along a first cylindrical surface, and a stator with stator windings disposed along a second cylindrical surface, the first and second cylindrical surfaces of stator and rotor being concentrically disposed, and the stator windings being substantially symmetrical relative to an axis of movement of the linear motor. Additionally, a plurality of identically acting first surfaces are stacked with a corresponding number of identically acting second surfaces, the first and/or second surfaces each being operable jointly in operative connection.”

The second paragraph on page 3 is amended as follows:

“[According to claim 7,] [c]Cooling ducts may be disposed in the cylindrical walls of the stator, so that the heating, caused by the current, can be reliably dissipated. The cooling medium used therefor can, at the same time, be used to control the temperature of other component parts in the injection molding machine.

IN THE CLAIMS

Claims 1-11 are amended as follows:

1. (Amended/Marked up) Injection molding machine for processing plastics materials and [other] plasticisable [compounds] materials, [having] comprising: an injection molding unit [(S)] and a mould closing unit [(F)], which [units] are operated at least partially by an electric driving unit[s in the form of] including at least one linear

motor, which has a rotor with magnets [(25)], disposed along a first cylindrical surface [(11)], and a stator with stator windings [(26)] disposed along a[n] [additional] second cylindrical surface [(12)], the first and second cylindrical surfaces [(11,12) of stator and rotor] being concentrically disposed, and the stator windings [(26)] being substantially symmetrical relative to [the] an axis of movement [(a-a)] of the linear motor, [characterized in that] wherein a plurality of identically acting first surfaces [(11)] are stacked with a corresponding number of identically acting [additional] second surfaces [(12)], at least one of the first and[/or additional] second surfaces [each] being operable jointly in operative connection.

2. (Amended/Marked up) Injection molding machine according to claim 1, [characterized in that] wherein the magnets are [magnets or] separately excited coils with an iron core.

3. (Amended/Marked up) Injection molding machine according to claim 1, [characterized in that] wherein the electric driving unit is a regulated servo driving unit.

4. (Amended/Marked up) Injection molding machine according to [one of] claim[s] 1 [to 3], [characterized in that] wherein the identically acting first [or respectively additional] or second surfaces are [the] an outside and inside of a first cylinder [(60)], and [in that] wherein the identically acting [additional or respectively] first or second surfaces are so disposed on [two] concentric second and third cylinders [(70,71)] that [the] an internal surface of the [external] second cylinder [(70)] cooperates with the outside of the first cylinder, and [the] an external surface of the [internal] third cylinder [(71)] co-operates with the inside of the first cylinder [(60)].

5. (Amended/Marked up) Injection molding machine according to [one of] claim[s] 1 [to 4], [characterized in that] wherein the linear motor is cylindrical and is overlapped on the outside by a[n additional] cylinder [(17)], which guides [the]

faces of the rotor and the stator, which are moved towards one another, along a separate bearing face [(19)] by means of at least one mounting [(18)].

6. (Amended/Marked up) Injection molding machine according to [one of] claim[s] 1 [to 5], [characterized in that] wherein the stator windings [(26)] are divided along the axis of movement [(a-a)] into a plurality of separate electrical switching zones.

7. (Amended/Marked up) Injection molding machine according to [one of] claim[s] 1 [to 6], [characterized in that] further comprising cooling ducts [(27)], which lie behind or adjacent the stator windings [(26)] when viewed from the magnets (25)], are associated with said stator windings, [which] wherein a temperature of the cooling ducts [have their temperature] is controlled by means of a cooling medium.

8. (Amended/Marked up) Injection molding machine according to [one of] claim[s] 1 [to 7], [characterized in that] wherein the electric driving unit is [at least one of the following assemblies of the injection molding machine:

-] a closing mechanism for moving [the] a movable mould carrier [(13)] towards [the] a stationary mould carrier [(14)] and away from said stationary carrier and for applying [the] a closing force [if necessary,
- arrangement for applying the closing force,
- driving unit for fitting the nozzle (21) onto the injection mould (M),
- injection means for axially moving the feeding means(15),
- ejector unit (16),
- core pulling unit (K) on the injection mould (M),
- driving unit for a closure nozzle (V)].

9. (Amended/Marked up) Injection molding machine according to [one of] claim[s] 1 to 8] 4, [characterized in that] wherein the linear motor is employed as

[the] a closing mechanism, and [in that] wherein there is a space in [the] an interior of the third [internal] cylinder [(71)] to accommodate an ejector unit [(16)].

10. (Amended/Marked up) Injection molding machine according to [one of] claim[s] 1 [to 9], [characterized in that] wherein the linear motor is employed as [the] an injection means [(E)], [the] a covering of the cylindrical surfaces [(11,12),] increasing during displacement of [the] a feeding means [(15)] to [the] an injection mould [(M)].

11. (Amended/Marked up) Injection molding machine according to [one of] claim[s] 1 [to 10], [characterized in that] wherein the linear motor is employed as [the] a closing mechanism, [the] a covering of the cylindrical surfaces [(11,12)] increasing as [the] parts of [the] an injection mould [(M)] approach one another.

16/pst

JC13 Rec'd PCT/PTO 05 NOV 2001

- 1 -

INJECTION MOLDING MACHINE FOR PROCESSING PLASTICS MATERIALS**DESCRIPTION****5 Reference to related applications**

The present application claims the priority of German Patent Application 199 20 626.0, filed on 5.05.1999, the disclosed contents of which are hereby expressly also made the subject-matter of the present application.

10

Field of the invention

The invention relates to an injection molding machine for processing plastics materials and other plasticisable compounds, wherein at least partially electrically operated driving units are used to operate said machine, in accordance with the preamble of claim 1.

15

Prior art

A linear motor, which is used as the driving unit and is provided with a rotor and stator, is known for plastics material molding machines from DE-T2 37 82 817, which forms the basis for the preamble of claim 1 and corresponds to EP 0 280 743 B1, and JP-A 63-1516, said rotor and stator having cylindrical surfaces which are in operative connection with one another. These surfaces permit the magnetic face, which is needed for the required advancing forces, to be suitably incorporated in the drive axis. If the stator windings are symmetrically disposed in accordance with DE-A 44 45 283, the relatively high bearing forces caused by the magnetism are mutually excluded. However, even there, mention is constantly made in the description of only one primary part and one secondary part, which parts co-operate accordingly with one another. If Figure 3 there is additionally considered, it becomes apparent that the internally situated pipe is merely a carrier pipe which, just like the externally situated pipe, is neither a stator nor a rotor. When such a linear motor is used, there is a simultaneous saving in the complex converting means, which are susceptible to wear and serve to convert a rotary movement into a linear movement, such as, for example, a transmission mechanism, a spindle, levers and toothed rods (cf. also EP-A 744 815), but the forces, which are required for a plastics material injection molding machine, cannot yet be applied therefore to a sufficient extent.

35

Electrical driving units are also often used in conjunction with injection molding machines. Thus, for example, it is known from EP 0 662 382 to stack together various hollow-shaft motors inside the injection molding unit to inject the plasticised compound into the injection mould and to fit the nozzle onto the injection mould. However, it is necessary for such purpose, and time-consuming, to convert the rotary movements, produced by the hollow-shaft motors, into translatory movements. However, since all of the shafts or axis for the injection molding machine are translatory shafts with the exception of the feed screw for metering the material to be plasticised, the use of such hollow-shaft motors is only recommended to a limited extent.

From handling techniques and medical techniques, linear motors are known which, however, do not have sufficient advancing forces, so that the linear motors, which are mainly fitted in a flat manner, are not suitable for use in an injection molding machine. (Company brochure entitled "New Linear Motors and its applications" produced by the company called Fanuc, published in FANUC Tech. Rev. 112, pp. 25-36 (December, 1998); specification sheet linear motors entitled Lin.Mot P belonging to Sulzer Electronics AG, Zurich.)

Summary of the invention

Based on this prior art it is the object of the present invention to provide a linear motor for an injection molding machine, which motor can also apply the advancing forces required for an injection molding machine.

This object is achieved by an injection molding machine having the features of claim 1.

In consequence, various cylindrical faces can be stacked one inside the other so that a plurality of identically acting magnetic faces are produced which contribute towards increasing the advancing forces up to a range which is required for plastics material injection molding machines, e.g. for applying the closing force. The alleged disadvantage is tolerated in such case, i.e. that the linear motor can tilt more easily so that greater demands for precision are to be made on the means for guiding the parts of the linear motor. However, this is compensated for again by the more compact construction which can be achieved.

Although it is known, in prior art, which forces are required for an injection molding machine to produce molded parts, only circular arrangements were proposed there, the rotor and stator having concentric surfaces, since the person skilled in the art has probably concluded

therefrom, incorrectly, that a corresponding alternative arrangement cannot be achieved to a suitable extent. In order to operate the surfaces jointly in operative connection with one another in fact, said surfaces have to be worked with appropriate precision. In such case, the precision required for the operation of the linear motor increases exponentially with an increasing spacing from the central line of the cylindrical surfaces so that the linear motor can tilt more easily, the greater this spacing is, more especially when the linear motor is to be kept short in order to achieve as compact a construction of the entire injection molding machine as possible. This is further emphasized by the high temperatures which occur at high forces. This may probably also be the reason why, despite their advantages, linear motors have not yet been successful in the field of plastics material injection molding machines, since hitherto the corresponding forces could still not be applied.

According to claim 7, cooling ducts may be disposed in the cylindrical walls of the stator, so that the heating, caused by the current, can be reliably dissipated. The cooling medium used therefor can, at the same time, be used to control the temperature of other component parts in the injection molding machine.

Additional advantages are found in the sub-claims and in the following description of the Figures.

Brief description of the Figures

The invention is explained hereinafter with reference to a plurality of embodiments which are illustrated in the accompanying Figures. In the drawing:

Fig. 1 illustrates an injection molding unit moved onto the stationary mould carrier of a mould closing unit;

Fig. 2 is a horizontal sectional view through the injection molding unit in the region of carrier block and injection bridge;

Fig. 2a is a sectional view taken along the line 2a-2a of Fig. 2;

Fig. 3 is a sectional view according to Fig. 2 of an alternative embodiment;

Fig. 4 illustrates an enlarged portion taken from Fig. 3 in the region of the injection bridge;

Fig. 5 is a side elevational view of a mould closing unit, which is shown partially in section;

Fig. 6 illustrates an enlarged portion taken from Fig. 5 in the region of the movable mould carrier;

Fig. 7 is a side elevational view, shown partially in section, of a 5-point toggle lever of a mould closing unit;

5 Fig. 8 is an enlarged view of one of the two 5-point toggle levers according to Fig. 7;

Fig. 9 illustrates a mould closing unit having a Y-shaped toggle lever;

Fig. 10 illustrates the enlarged Y-shaped toggle lever;

Fig. 11 is a horizontal sectional view through an injection molding unit in the region of the carrier block and injection bridge in an alternative embodiment;

10 Fig. 12 is a side elevational view, shown partially in section, of a mould closing unit of the pulling type;

Figs. 13 and 14 are views according to Fig. 11 of injection molding units in two additional embodiments; and

Fig. 15 illustrates an injection molding unit provided with a closure nozzle.

Detailed description of preferred embodiments

The invention is now explained more fully, by way of example, with reference to the accompanying drawings. However, the embodiments are only examples which are not to restrict the inventive concept to one specific arrangement.

Fig. 1 illustrates initially the injection molding unit of an injection molding machine for processing plastics materials and other plasticisable compounds, such as, for example, ceramic or metallic pulverulent compounds. A plasticising cylinder P is accommodated in the injection molding unit on a carrier block 52. The plasticisable compound is plasticised in the plasticising cylinder and injected into an injection mould M via a nozzle 21. For such purpose, the nozzle 21 penetrates the stationary mould carrier 14. The front portion of the injection molding unit S is supported on the machine base 51 via a supporting member 22 and guided and supported on the machine base via a guiding element 53. In order to fit the nozzle 21 onto the injection mould M, and to remove such if necessary, nozzle driving units 50 are provided which are hydraulically configured in Fig. 2. The cylinders of the hydraulic nozzle driving unit 50 form, with the carrier block 52 and a closure 54, a rigid frame which is guided on guide bars 20. The guiding element 53 is guided on the cylinders of the nozzle drive 50.

35 In order to inject plasticised material into the injection mould, an injection unit E is provided. When the injection unit is actuated, the injection bridge 23 and, hence, the feed screw is axi-

ally moved. The injection bridge 23 carries the metering motor 28, by means of which a feeding means 15 - a feed screw in the embodiment - can be rotated. While the metering motor 28 has to produce a rotary movement to rotate the feeding means 15, translatory movements are required to drive the nozzle and for injection purposes. A linear motor is used as the electrical driving units for these translatory movements, and it includes a rotor having magnets disposed along a first cylindrical surface 11. The linear motor also has a stator with stator windings 26 disposed along an additional cylindrical surface 12. The cylindrical surfaces 11 and 12 of the stator and rotor are concentrically disposed, so that the magnetic face, which is required to produce suitable advancing forces for movements in the injection molding machine, can be increased. So that the relatively high bearing forces are eliminated, not only are the circular surfaces provided; additionally the stator windings 26 and preferably also the magnets 25 of the stator are disposed symmetrically relative to the axis of movement a-a of the linear motor. Fig. 2a illustrates the circular surfaces and shows the application of corresponding forces on the basis of the force density which can be achieved at these faces.

In all of the embodiments, what is to be understood by the term surfaces is both the external surface of a cylinder and the internal surface of a pipe; in both cases, cylindrical surfaces 11 and 12 are involved. The magnets 25 may be permanent magnets, but they may also be separately excited coils having an iron core. Furthermore, the driving unit may be operated in a controlled or regulated manner, that is to say, for example, it can be operated as a servomotor over a regulating path.

In the case of the injection molding units illustrated in Figs. 1 and 4, the linear motors of the injection unit are so disposed that the axis of movement a-a of the linear motor is, at the same time, the injection axis s-s of the injection molding unit S. When transferred to the mould closing unit shown in Figs. 5 - 8 (see below), the axis of movement a-a of the linear motor is, at the same time, the axis of symmetry s-s of the mould closing unit F. For simplification purposes, the same identification s-s is used in both cases, and also, moreover, the reference numerals in the drawings are so selected that identically acting parts are provided with identical reference numerals.

To produce the necessary advancing forces, the cylindrical faces are disposed in a stacked manner. Figs. 2 and 2a illustrate how a plurality of identically acting first surfaces 11 are stacked with a corresponding number of additional surfaces 12 for the injection movement. A cylinder 60 is supported on the closure 54, which is moved jointly with the carrier block 52 via

the nozzle driving unit 50 as a consequence of the connection, and it has identically acting surfaces on its inside and on its outside. It may be open to question whether these surfaces are initial surfaces of the rotor or additional surfaces of the stator. In the embodiment, the surfaces of the cylinder 60 are first surfaces of the rotor. These surfaces are formed by identically acting additional or first surfaces of two concentric cylinders 70 and 71. When viewed externally, the impression is given that piston rod and cylinder of a piston-cylinder-unit would extend into one another. The surfaces are so disposed that the internal surface of the external cylinder 70 co-operates with the outside of the cylinder 60, and the external surface of the internal cylinder 71 co-operates with the inside of the cylinder 60. A greater advancing force than was usual hitherto can be produced by this stacking arrangement.

In order to protect the linear motor from contamination and, if necessary, to produce a chamber which can be provided with a suitable lubricant, an additional cylinder 17 moves jointly with the cylinder 60 and is, in this respect, just like the cylinder 60 connected to the closure 54. This cylinder 17 overlaps the linear motor and has, at its front end on the left of Fig. 2, a mounting 18 which cooperates with a bearing face 19 of the cylinder 70. The parts of the linear motors are guided towards one another via mounting 18 and bearing face 19, and, in consequence, the parts of the injection molding machine are centered in order to ensure a precision which is required to produce high-quality parts. At the same time, the mounting 18 and bearing face 19 act in a sealing manner.

If the stator windings of the concentric cylinders 70 and 71 are energized, an advancing movement results in co-ordination with the magnet of the cylinder 60. While the cylinder 60 remains in an unchanged manner, the concentric cylinders 70 and 71 are moved jointly with the injection bridge 23. Fig. 3 illustrates an alternative embodiment of the injection molding unit S, where cylinder 60 and concentric cylinders 70 and 71 have been reversed. The cylinder 60, with which the cylinders 70 and 71 co-operate, is mounted on the carrier block 52, said cylinders now being a component part of the injection bridge 23. The reversal necessitates a reversal of rotor and stator. If, in the first embodiment, the cylinder 60 was the rotor, then it is now the stator. The injection bridge 23 also slides here on the cylinders of the hydraulic nozzle driving unit, but a frame, which reinforces the injection molding unit S per se, is not provided as in the first case. The additional cylinder 17 supports the linear motor by means of mounting 18 and in co-operation with the bearing face 19.

According to Fig. 3, the stator windings 26 can be divided into a plurality of separate electrical switching zones along their axis of movement a-a. The entire range of movement is

shown by the range D. During displacement, all of the switching zones A, B and C are involved during the injection operation, above all towards the end, in order to permit the required forces to be applied with the participation of all of the switching zones. However, as soon as a specific zone is no longer in operative connection with the surfaces of the rotor by means of its face, the zones which are no longer required can be switched-off to save energy.

Cooling ducts 27, which lie behind or adjacent the stator windings 26 when viewed from the magnets 25, are associated with said stator windings in the cylindrical walls of the stator, so that the heating, caused by the current, can be reliably dissipated. The cooling medium employed may be used at the same time to control the temperature of other component parts in the injection molding machine.

The enlarged portion according to Fig. 4 shows that the magnets 25 are also attached to the walls of the cylinders 70 and 71. The magnets are provided with the identifications for their north-south (N-S) poles. The stator windings 26, however, are identified with U-V. The injection bridge, which is substantially formed by the concentric cylinders 70 and 71, has sufficient space in its center, that is to say in the center of the cylinder 71, to support the metering motor 28 as well as the locking arrangement for the feeding means.

The linear motor, as an electrical driving unit, may also be employed for other assemblies of the injection molding machine. It is possible, more especially, to provide the translatory shafts with linear motors. On the injection molding side, such shafts are the driving unit for fitting the nozzle 21 onto the injection mould as well as the already explained injection means E or the actuating mechanism for a closure nozzle V (Fig. 15). On the side of the mould closing unit F, this is, for example, the closure mechanism for moving the movable mould carrier 13 towards and away from the stationary mould carrier 14, which may apply the closing force if necessary. If the mould closing unit is constructed so that the closing mechanism only accomplishes the mould closing movement, while the closing force is applied by a separate arrangement, this separate arrangement may be provided with a linear motor. On the mould closing side, an ejector unit 16 or a core puller unit K (Fig. 5) on the injection mould M may also be provided with a linear motor.

Fig. 5 illustrates a mould closing unit F, wherein the movable mould carrier 13 is moved along guide bars 56 by means of the closing mechanism. During displacement, the injection mould M is alternately closed and opened. The closing mechanism is supported on a sup-

porting element 57. Fig. 6 illustrates an enlarged portion of Fig. 5 in the region of the movable mould carrier. A comparable construction, such as was previously the case with the injection molding unit, is also apparent here. A cylinder 60, with an inside and an outside, is the rotor with the magnet 25. The movable mould carrier, however, carries the concentric cylinders 70 and 71 as the stator. The cylinder 60 and the additional cylinder 17 are mounted on the supporting element 57, said additional cylinder being mounted and guided on the bearing face 19 here also with the mounting 18. In the embodiment, therefore, relatively large cylinders are also stacked inside one another here. Sufficient space is available in the interior of the cylinder 71 to accommodate an ejector unit 16, which is also actuated as a linear motor. An extremely short structural design is therefore produced.

If desirable, however, a plurality of individual cylinders may also be stacked around the closing axis s-s and/or disposed concentrically, which cylinders are then operated identically in this respect.

The linear motor may also be used for other types of closing mechanisms, though the description of the stacking has been somewhat curtailed hereinafter to achieve a clear description. Figs. 7 and 8 illustrate a closing mechanism with a multi-point toggle lever, here a 5-point toggle lever. The movable mould carrier is guided on guide bars 56, and an ejector unit is to be actuated centrally in the movable mould carrier via a linear motor. Fig. 8 illustrates the structure of the 5-point toggle lever 80. The toggle lever is supported on the supporting element 57 by the pivot joint 84. It is supported on the movable mould carrier 13 by the pivot joint 86. The pivot joints 84 and 86 are interconnected via two arms 87 and 88 which, in turn, for their part are pivotally interconnected at the pivot point 85. A pivot point 83 for a pivotal arm 81 is provided on the arm 87. Said pivotal arm communicates with the drive at the pivotal point 82. If the drive is moved linearly along the closing axis, the arm 81 urges the arm 87 in an arc forwardly and then upwardly. The arms 87 and 88 thereby come into an extended position and are prevented from falling-back by automatic locking, supported by the arm 81. The advantage of this embodiment is that, in the extended position, no force has to be applied to the arm 81 in order to maintain the extended position. This is advantageous since, during the linear movement, the covering of the cylindrical surfaces 11 and 12 also reduces, so that the force, produced by the linear motor, is smaller towards the end of the movement. Fig. 8 also shows that the linear motor for the ejector unit 16 can be guided back into the cylinder of the linear motor of the closing mechanism O.

An alternative type of closing mechanism is the Y-shaped toggle lever shown in Figs. 9 and 10, which is otherwise constructed like the previously described mould closing units F. The Y-shaped toggle lever 90 supports the driving unit, in that it suspends said unit in a freely displaceable manner via two pivotal arms 91. If the rotor 30 is moved, it acts on the pivotal point 93 and brings the arms 92 into the extended position. Here also, a relatively small force is to be applied in the extended position. The rotor 30 may be so configured that, during the application of a small force, it only slightly co-operates with the surfaces of the stator while, during the application of a high force, a total co-operation of the surfaces 11 and 12 is effected.

It is thereby indicated that, basically, the cylindrical surfaces can be so disposed that, when a high force has to be applied, a large covering of the surfaces 11 and 12 also exists, so that a high force is produced also as a consequence of a large abutment face. This is explained for an injection molding unit S with reference to Fig. 11. The linear motor is employed as injection means E, wherein the covering of the cylindrical surfaces 11 and 12 is increasing when the nozzle is fitted onto the injection mould M. This is achieved when the cylinder 60 is supported on the carrier block. Here, the cylinder 60 is the stator. In order to move the injection bridge, the cylinders 70 and 71 are pulled over the cylinder 60 so that, during the injection process, a greater force is produced the further the feed screw is moved in the direction towards the injection mould. In consequence, the injection bridge 23 moves to the left in Fig. 11.

The same principle can also be achieved with the mould closing unit. Fig. 12 illustrates a linear motor as the closing mechanism, the covering of the cylindrical surfaces 11 and 12 increasing during the application of the closing force. A mould closing unit is involved, wherein the movable mould carrier is pulled over the stationary mould carrier 14. In the embodiment, the bars 56 are not securedly mounted on the stationary mould carrier. They are provided with the first surfaces in this region. If the stator is actuated on the stationary mould carrier, the rotor is pulled into the linear motor, so that a greater covering of the surfaces is produced with an increasing closing movement of the injection mould M, and maximum force is achieved at the end of the mould closing movement. Fig. 12 also shows that the linear motor has its axis of movement a-a coinciding with the central axis of the bar 56.

With an otherwise identical structure as in Fig. 3, Fig. 13 shows that the nozzle driving unit, which was hydraulic in Fig. 3, may also be in the form of a linear motor. In this respect, the bars 20 are provided with magnets, so that they may serve as rotors of the nozzle driving unit

N. They co-operate with a stator which slides along the bars 20. Because of this structure, a corresponding movement along the bars 20 is possible.

In an alternative embodiment, Fig. 14 shows that the axis of movement a-a of the linear motor may also coincide with the central axis of the guide bars 20 in the injection molding unit. In this embodiment, a stacking of injection means and nozzle driving unit N around the bars 20 is created. The nozzle driving unit N lies around the bar 20. The guide bar is the rotor, while a sleeve represents the stator 40. This sleeve is the stator on the inside and, in turn, is already the rotor with magnets for the injection means E on the outside. In consequence, an additional sleeve is placed around the sleeve as stator 41, which additional sleeve is, for its part, also the injection bridge 23. Finally, the injection bridge carries the metering motor 28.

It is self-evident that this description may be subjected to the most varied modifications, changes and adaptations, which range from equivalents to the dependent claims.

List of reference numerals

	11	cylindrical surface	60	cylinder
	12	additional cylindrical surface	70,71	concentric cylinder
5	13	movable mould carrier	80	5-point toggle lever
	14	stationary mould carrier	81	arm
	15	feeding means	82,83,85	pivotal point
	16	ejector unit	84,86	pivot joint
	17	additional cylinder	87,88	arm
10	18	mounting	90	Y-shaped toggle lever
	19	bearing face	91	supporting arm
	20	guide bar for S	92	arm
	21	nozzle	93	point of engagement
	22	supporting element	94	pivotal point
15	23	injection bridge		
	24	supporting member	a-a	axis of movement
	25	permanent magnet	m-m	central axis
	26	stator winding	s-s	axis of symmetry or injection axis
	27	cooling duct	A,B,C	switching zones
20	28	metering motor	D	entire range
	30	rotor	E	injection means
	40,41	stator	F	mould closing unit
	50	hydraulic nozzle driving unit	K	core puller unit (Fig. 5)
	51	machine base	M	injection mould
25	52	carrier block	N	nozzle driving unit
	53	guiding element	O	closing mechanism
	54	closure	P	plasticising cylinder
	56	guide bar for F	S	injection molding unit
	57	supporting element	V	closure nozzle (Fig. 15)

CLAIMS

1. Injection molding machine for processing plastics materials and other plasticisable compounds, having an injection molding unit (S) and a mould closing unit (F), which units are
5 operated at least partially by electric driving units in the form of at least one linear motor, which has a rotor with magnets (25), disposed along a first cylindrical surface (11), and a stator with stator windings (26) disposed along an additional cylindrical surface (12), the cylindrical surfaces (11,12) of stator and rotor being concentrically disposed, and the stator windings (26) being substantially symmetrical relative to the axis of movement
10 (a-a) of the linear motor, characterized in that a plurality of identically acting first surfaces (11) are stacked with a corresponding number of identically acting additional surfaces (12), the first and/or additional surfaces each being operable jointly in operative connection.
- 15 2. Injection molding machine according to claim 1, characterized in that the magnets are magnets or separately excited coils with an iron core.
3. Injection molding machine according to claim 1, characterized in that the electric driving unit is a regulated servo driving unit.
- 20 4. Injection molding machine according to one of claims 1 to 3, characterized in that identically acting first or respectively additional surfaces are the outside and inside of a cylinder (60), and in that identically acting additional or respectively first surfaces are so disposed on two concentric cylinders (70,71) that the internal surface of the external cylinder (70)
25 cooperates with the outside, and the external surface of the internal cylinder (71) co-operates with the inside of the cylinder (60).
5. Injection molding machine according to one of claims 1 to 4, characterized in that the linear motor is cylindrical and is overlapped on the outside by an additional cylinder (17),
30 which guides the faces of rotor and stator, which are moved towards one another, along a separate bearing face (19) by means of at least one mounting (18).
6. Injection molding machine according to one of claims 1 to 5, characterized in that the stator windings (26) are divided along the axis of movement (a-a) into a plurality of separate electrical switching zones.
35

7. Injection molding machine according to one of claims 1 to 6, characterized in that cooling ducts (27), which lie behind or adjacent the stator windings (26) when viewed from the magnets (25), are associated with said stator windings, which ducts have their temperature controlled by means of a cooling medium.

8. Injection molding machine according to one of claims 1 to 7, characterized in that the electric driving unit is at least one of the following assemblies of the injection molding machine:


- closing mechanism for moving the movable mould carrier (13) towards the stationary mould carrier (14) and away from said stationary carrier and for applying the closing force if necessary,
- arrangement for applying the closing force,
- driving unit for fitting the nozzle (21) onto the injection mould (M),
- injection means for axially moving the feeding means(15),
- ejector unit (16),
- core pulling unit (K) on the injection mould (M),
- driving unit for a closure nozzle (V).

9. Injection molding machine according to one of claims 1 to 8, characterized in that the linear motor is employed as the closing mechanism, and in that there is space in the interior of the internal cylinder (71) to accommodate an ejector unit (16).

10. Injection molding machine according to one of claims 1 to 9, characterized in that the linear motor is employed as the injection means (E), the covering of the cylindrical surfaces (11,12), increasing during displacement of the feeding means(15) to the injection mould (M).

11. Injection molding machine according to one of claims 1 to 10, characterized in that the linear motor is employed as the closing mechanism, the covering of the cylindrical surfaces (11,12) increasing as the parts of the injection mould (M) approach one another.

FIG. 1

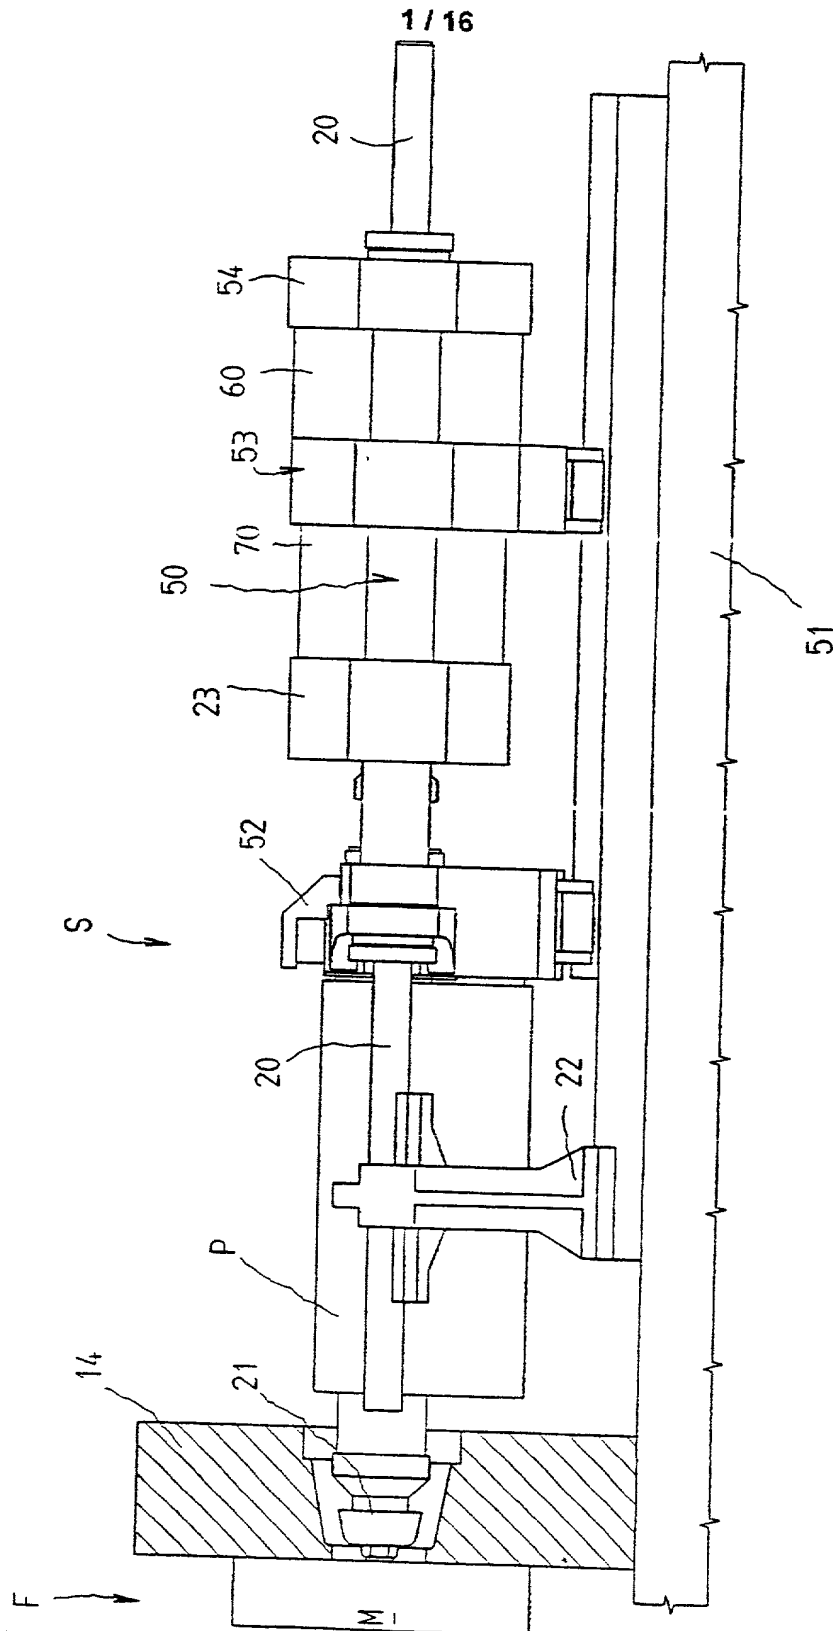

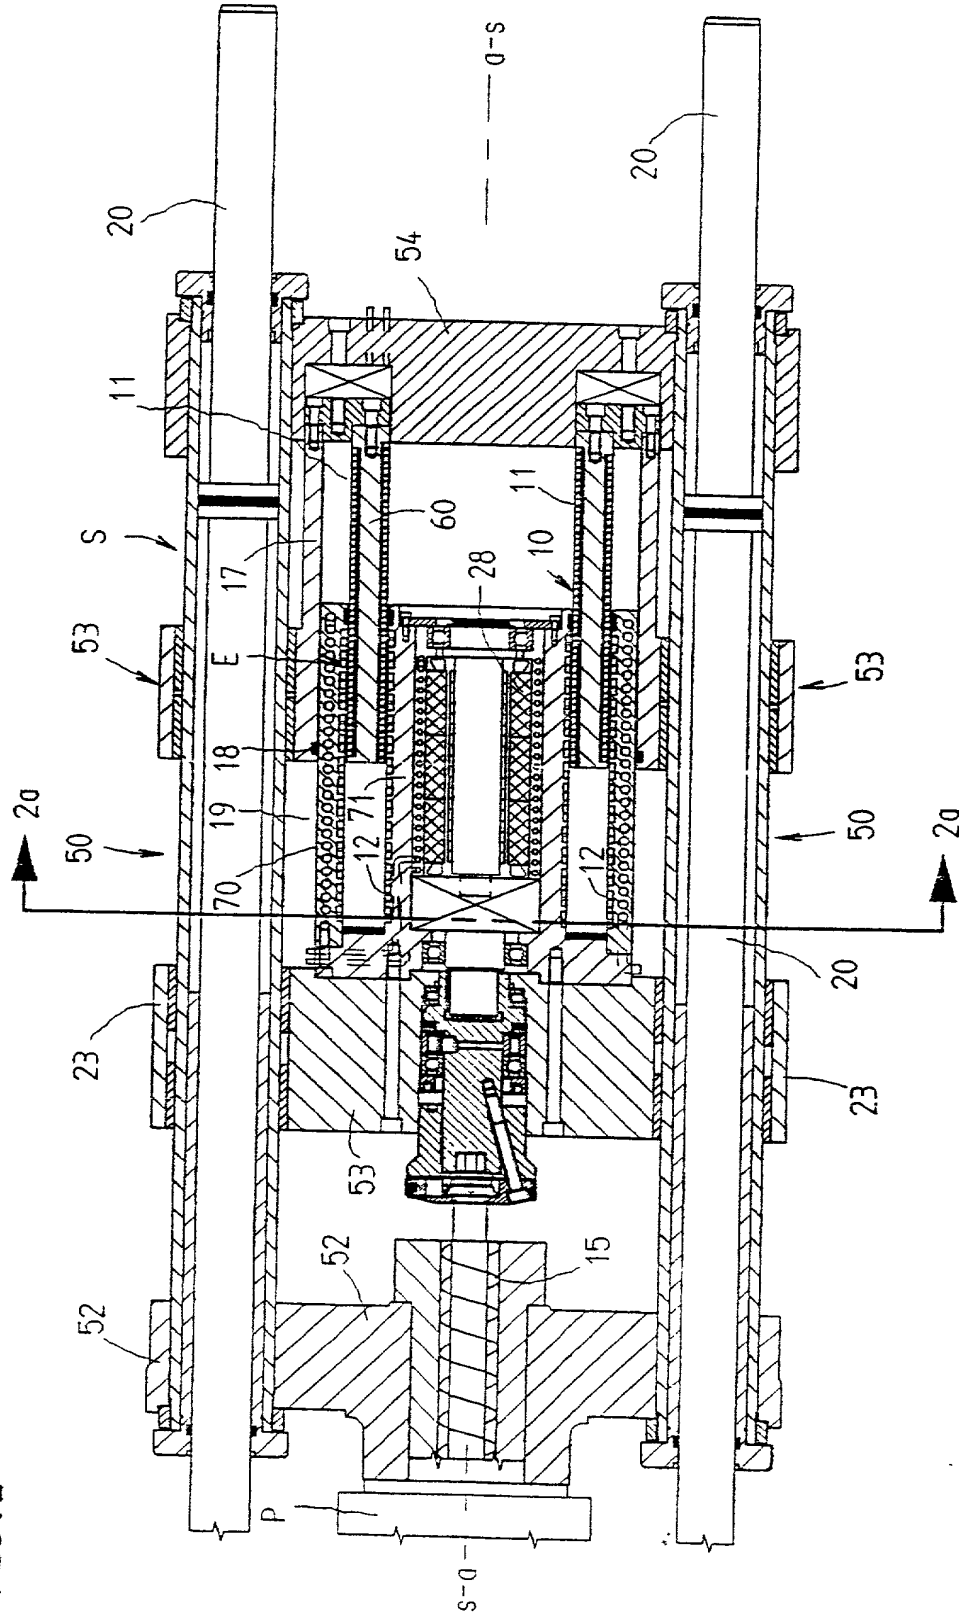
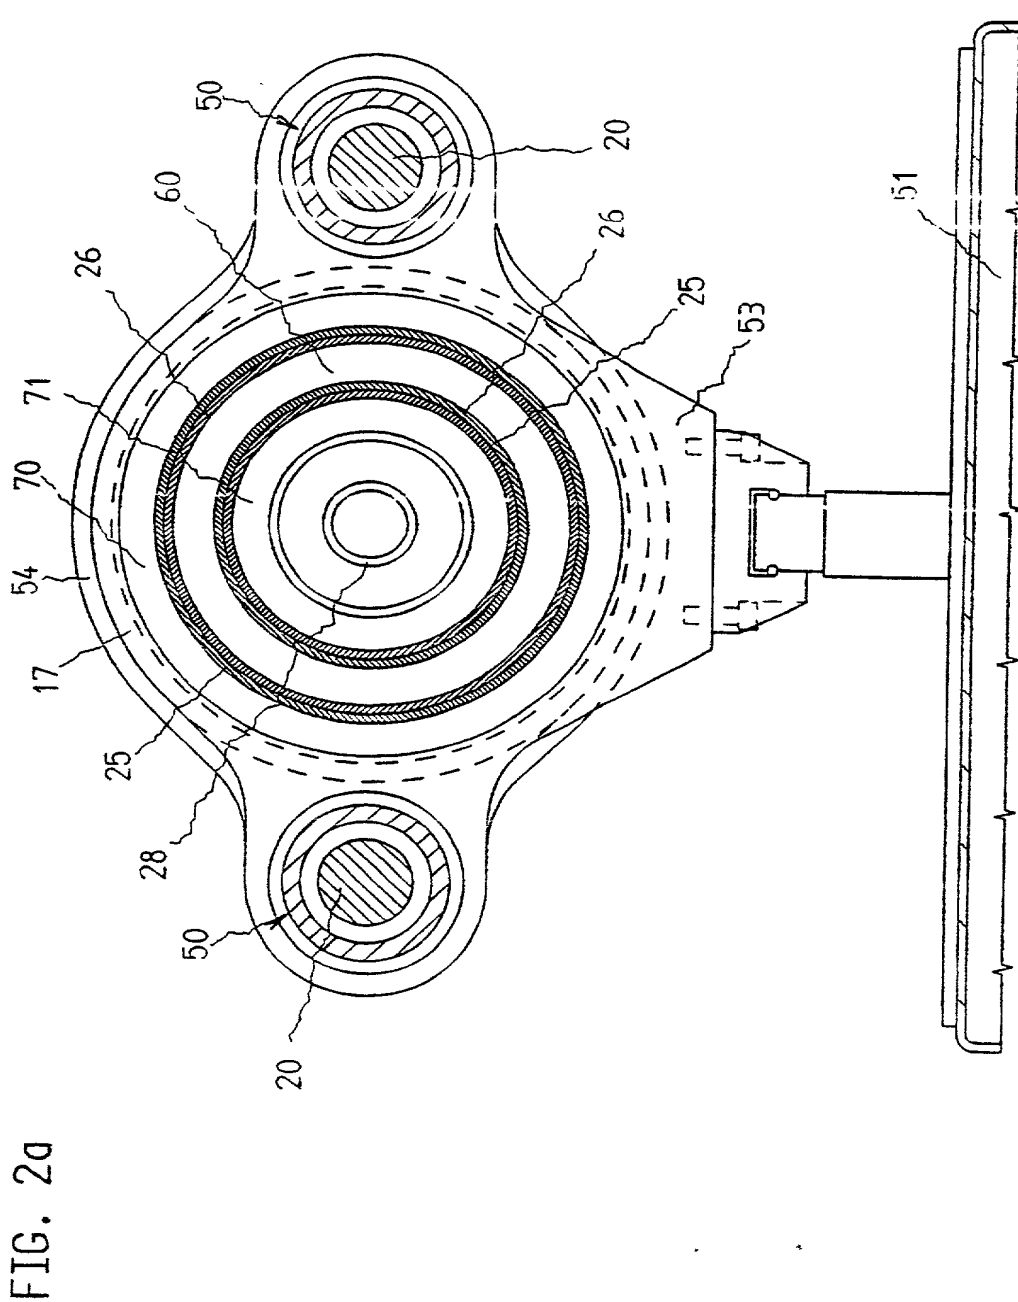


FIG. 2




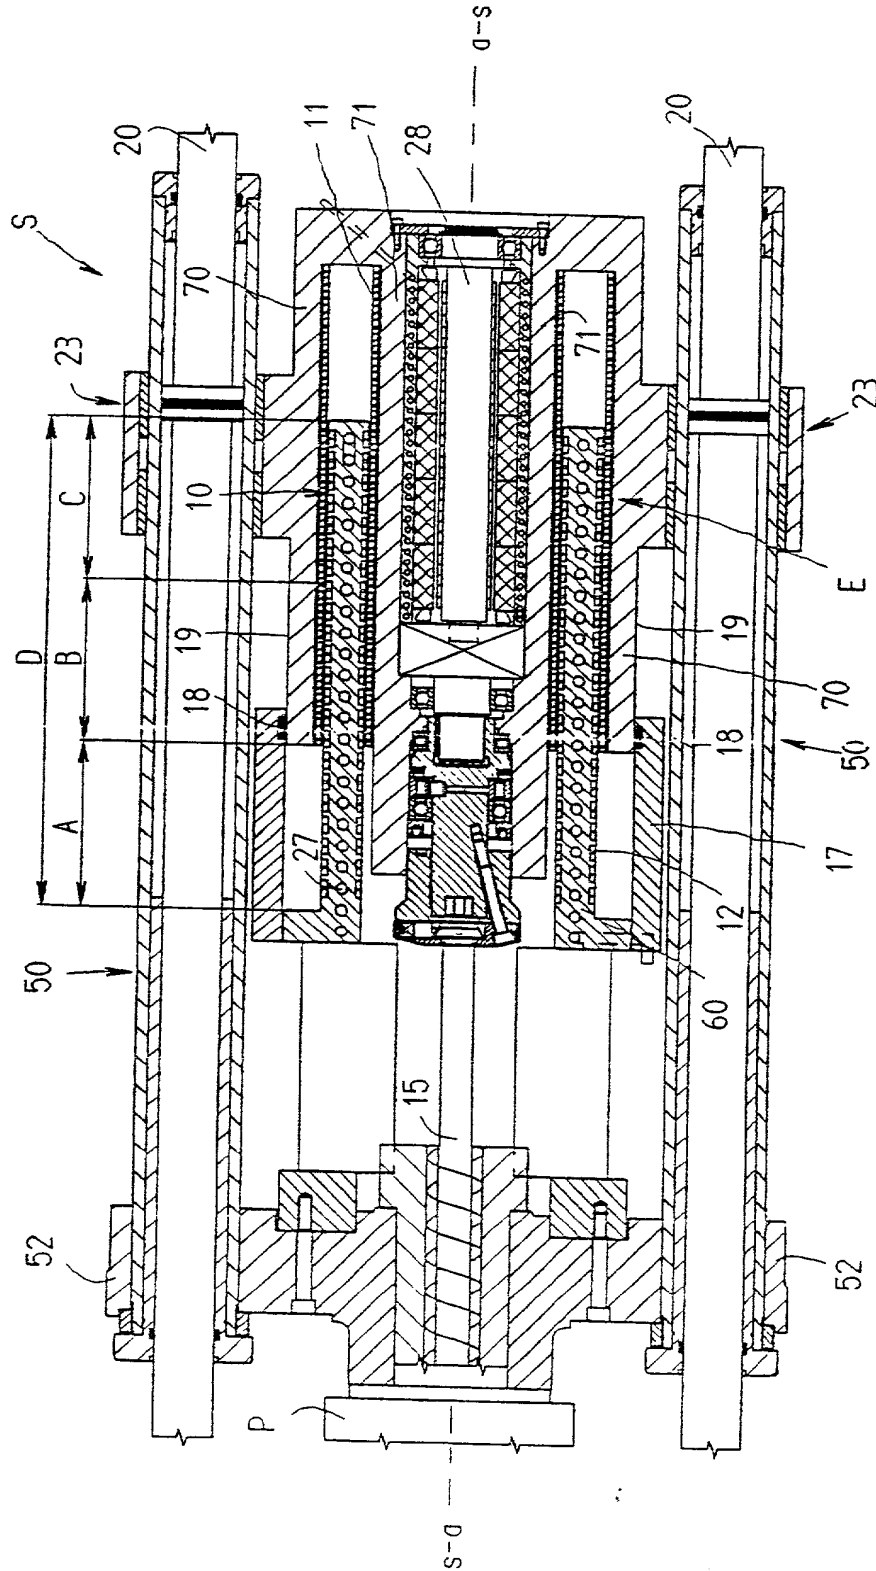


FIG. 3

FIG. 4

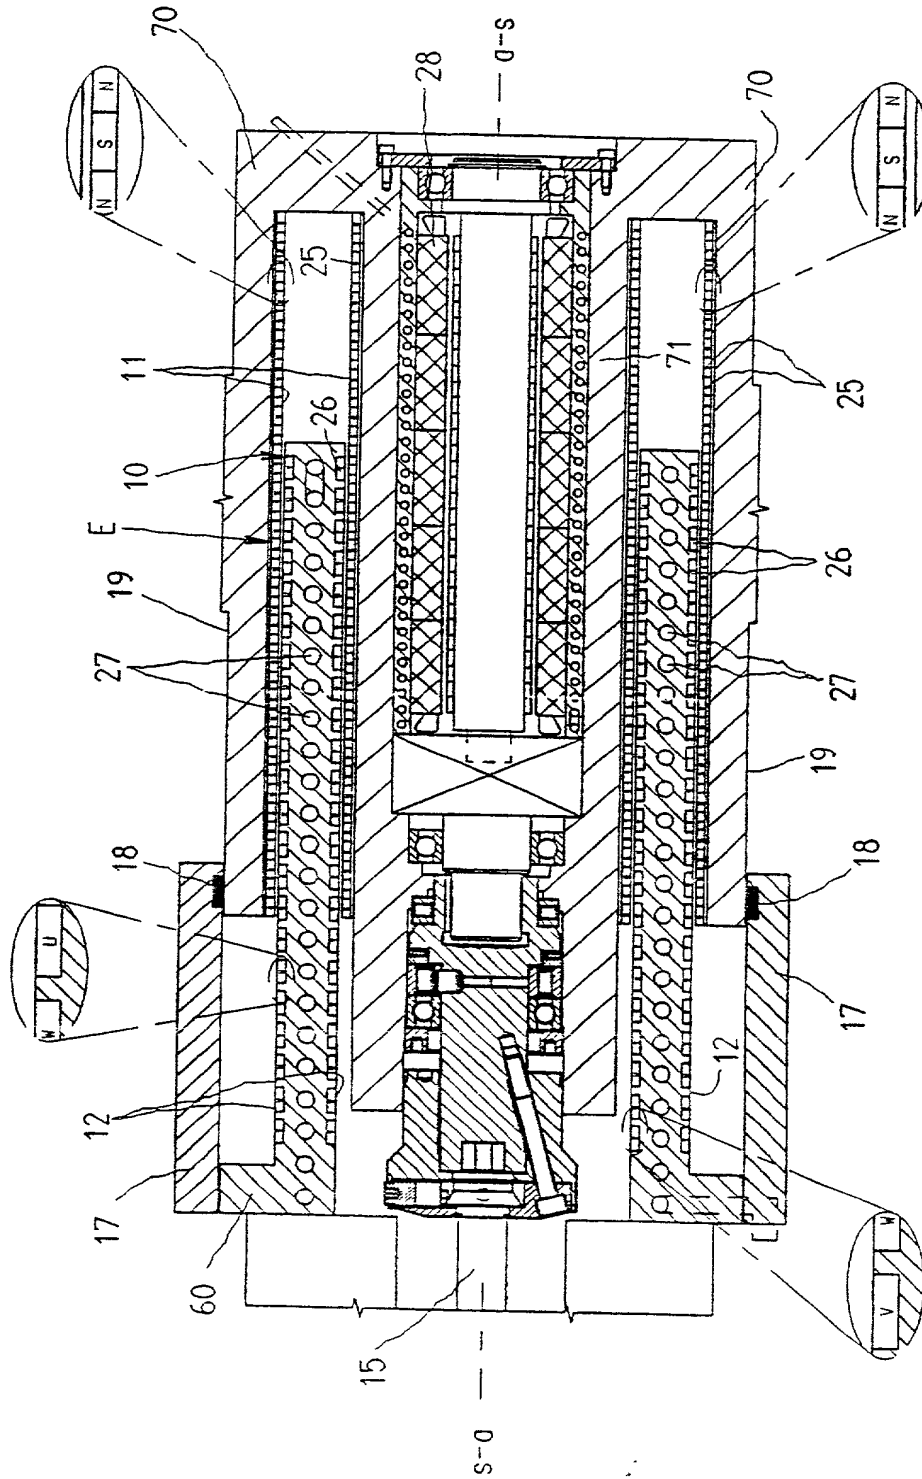

7/16

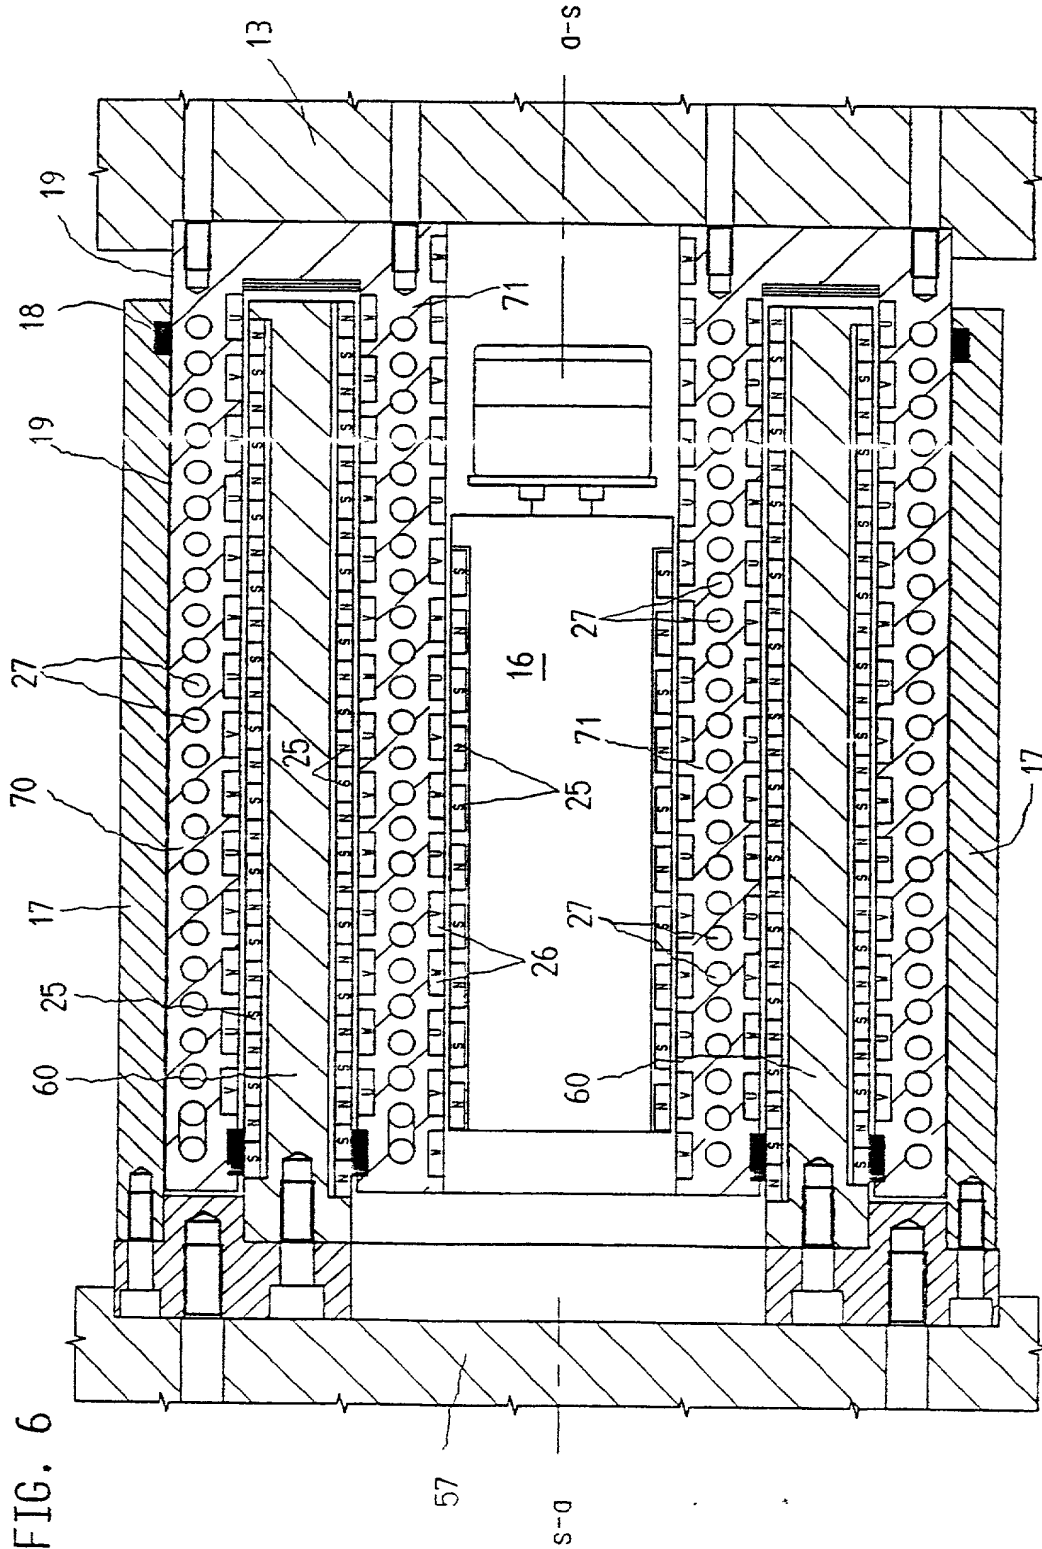


FIG. 6

FIG. 6 is a cross-sectional view of a multi-layered electronic assembly. The assembly includes a top substrate 13, a middle substrate 17, and a bottom substrate 19. A central core 16 is positioned between the middle and bottom substrates. The core 16 features a central cavity 60 and is surrounded by a layer of conductive material 25. The middle substrate 17 is characterized by a series of circular vias 27. Similarly, the bottom substrate 19 and the top substrate 13 also contain circular vias 27. The assembly is depicted with a vertical section line S-S at the bottom. Additional labels include 18, 19, 25, 26, 27, 60, 70, 71, and 77, which identify various components and features of the assembly.

FIG. 7

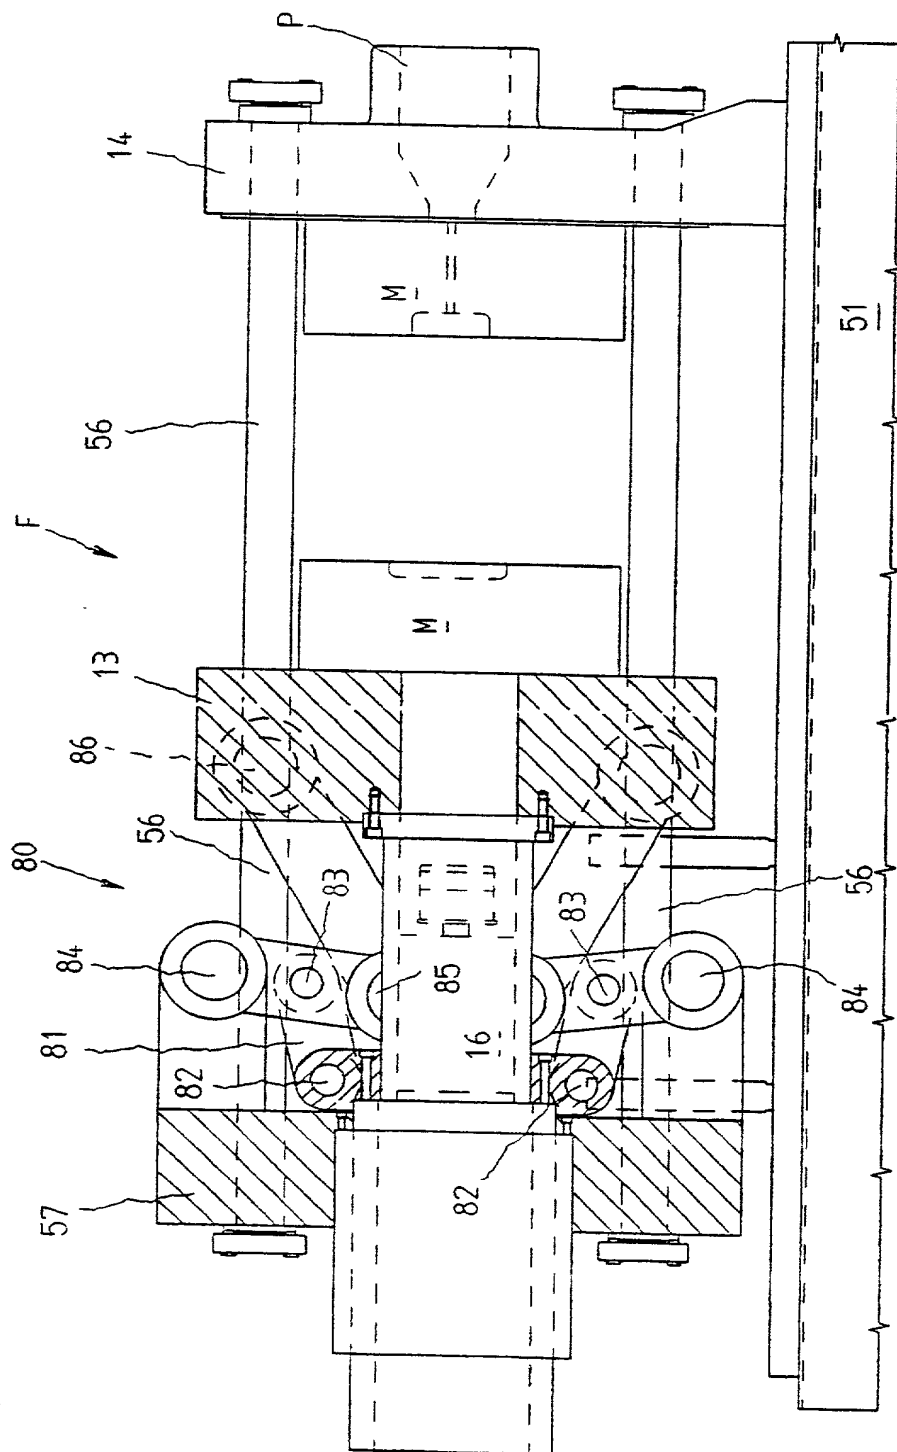




FIG. 8

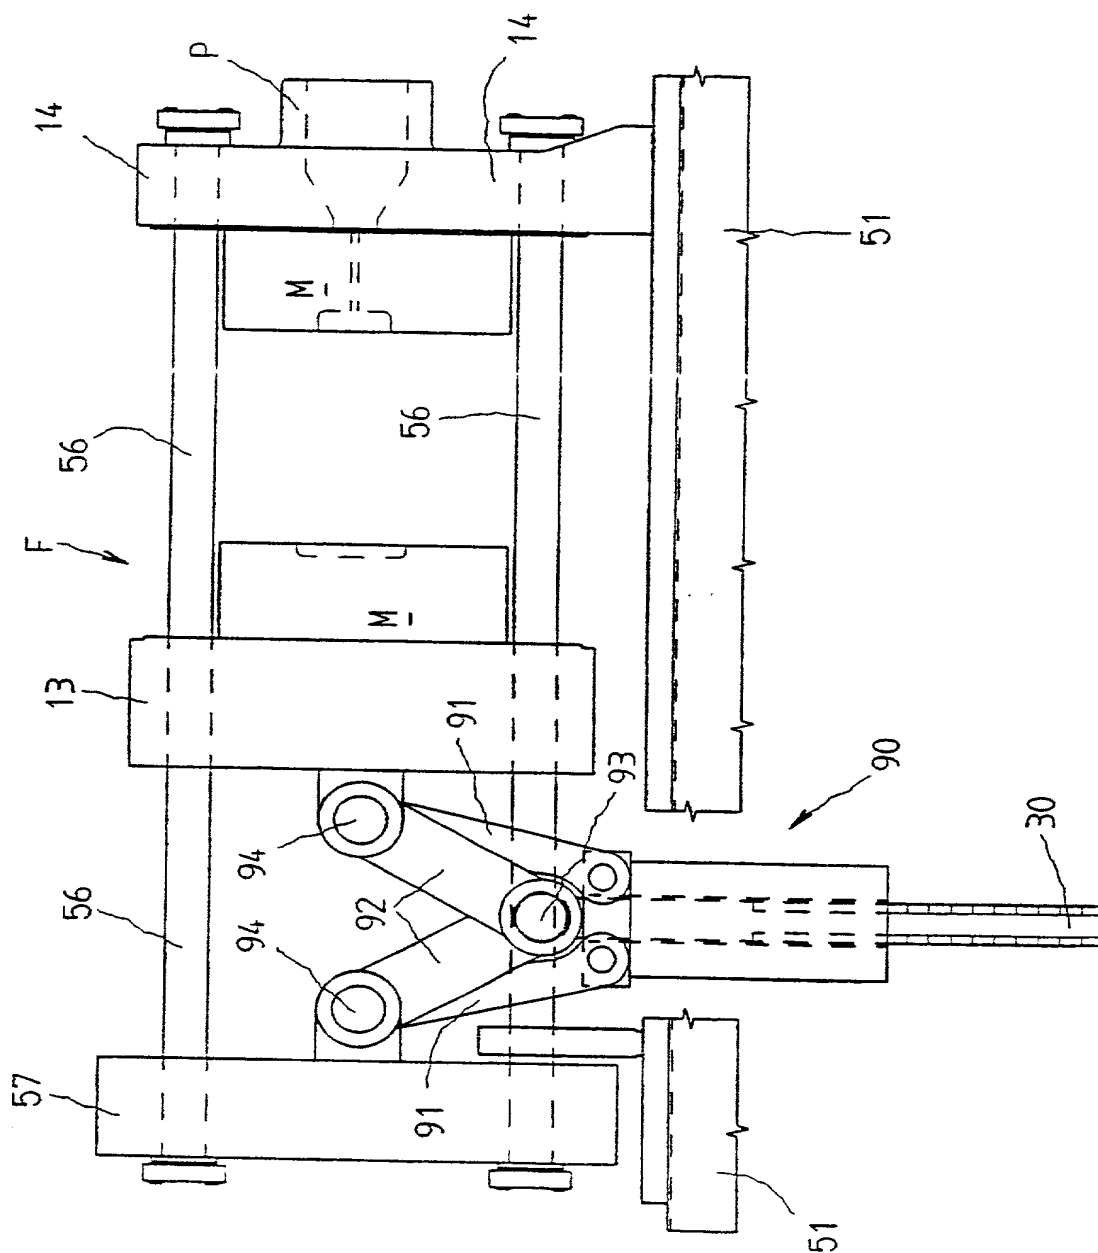


FIG. 9

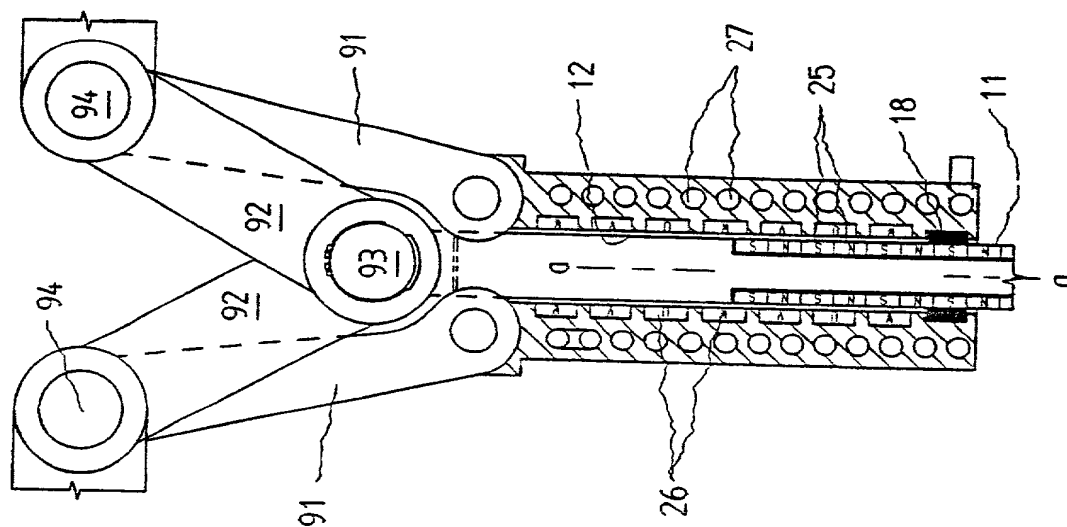
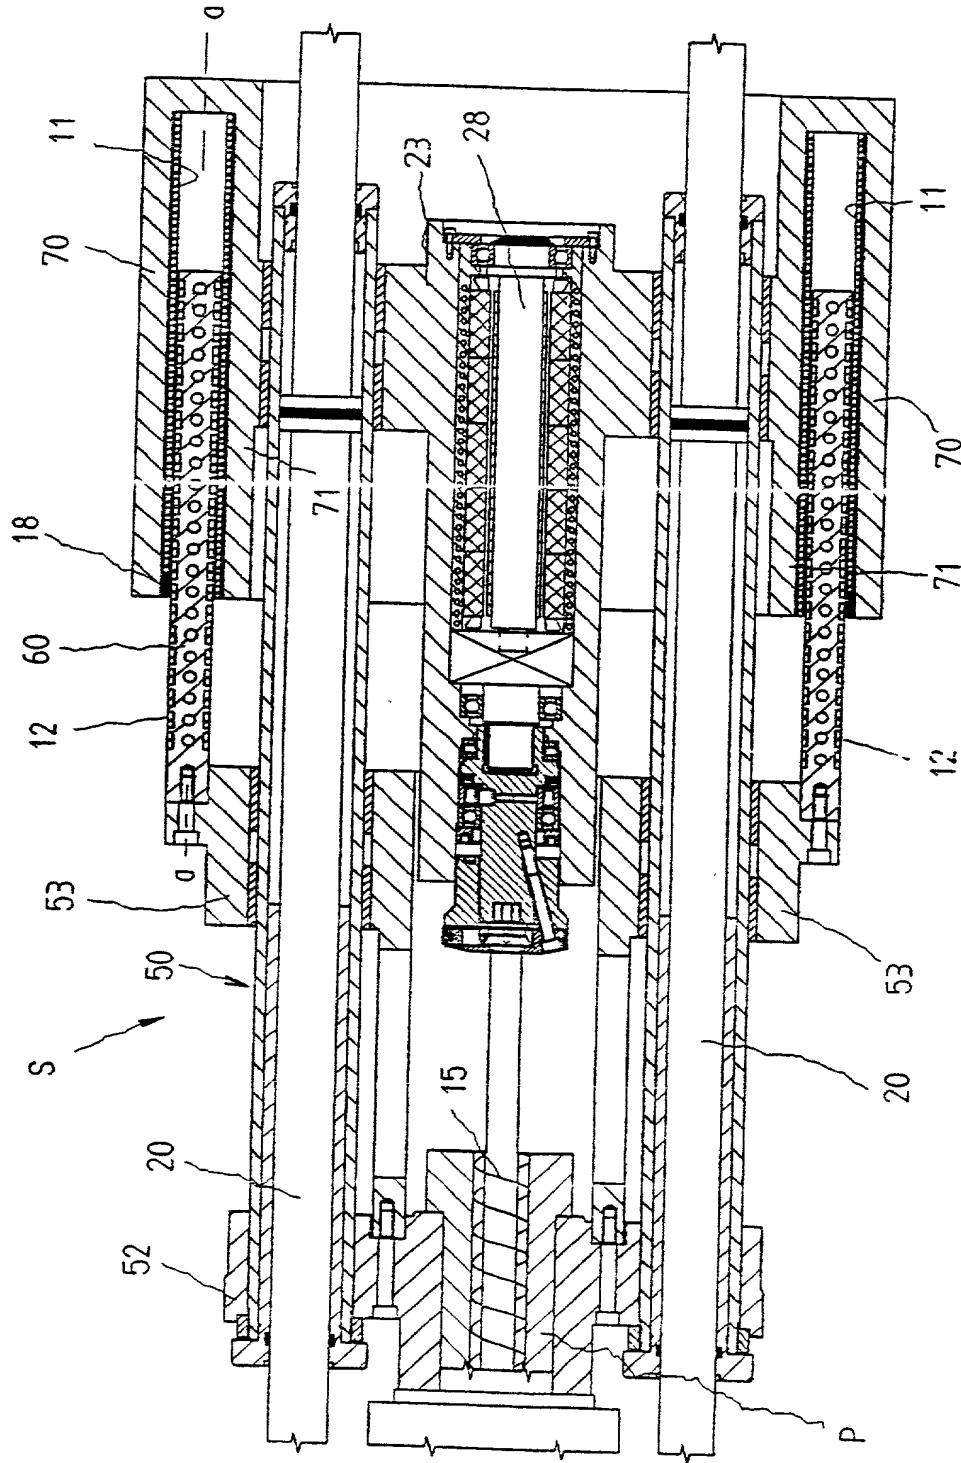
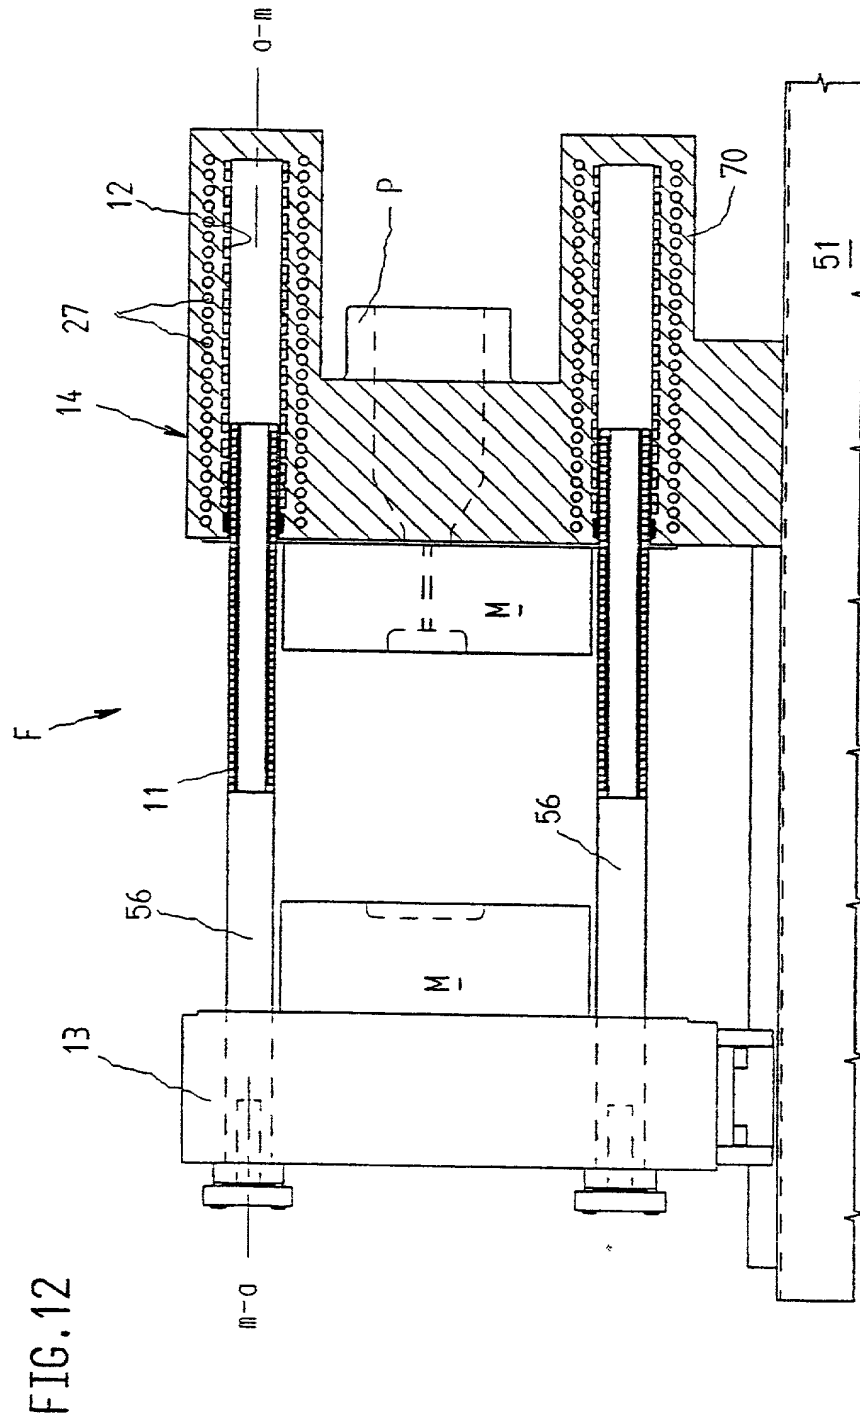


FIG. 10

FIG. 11





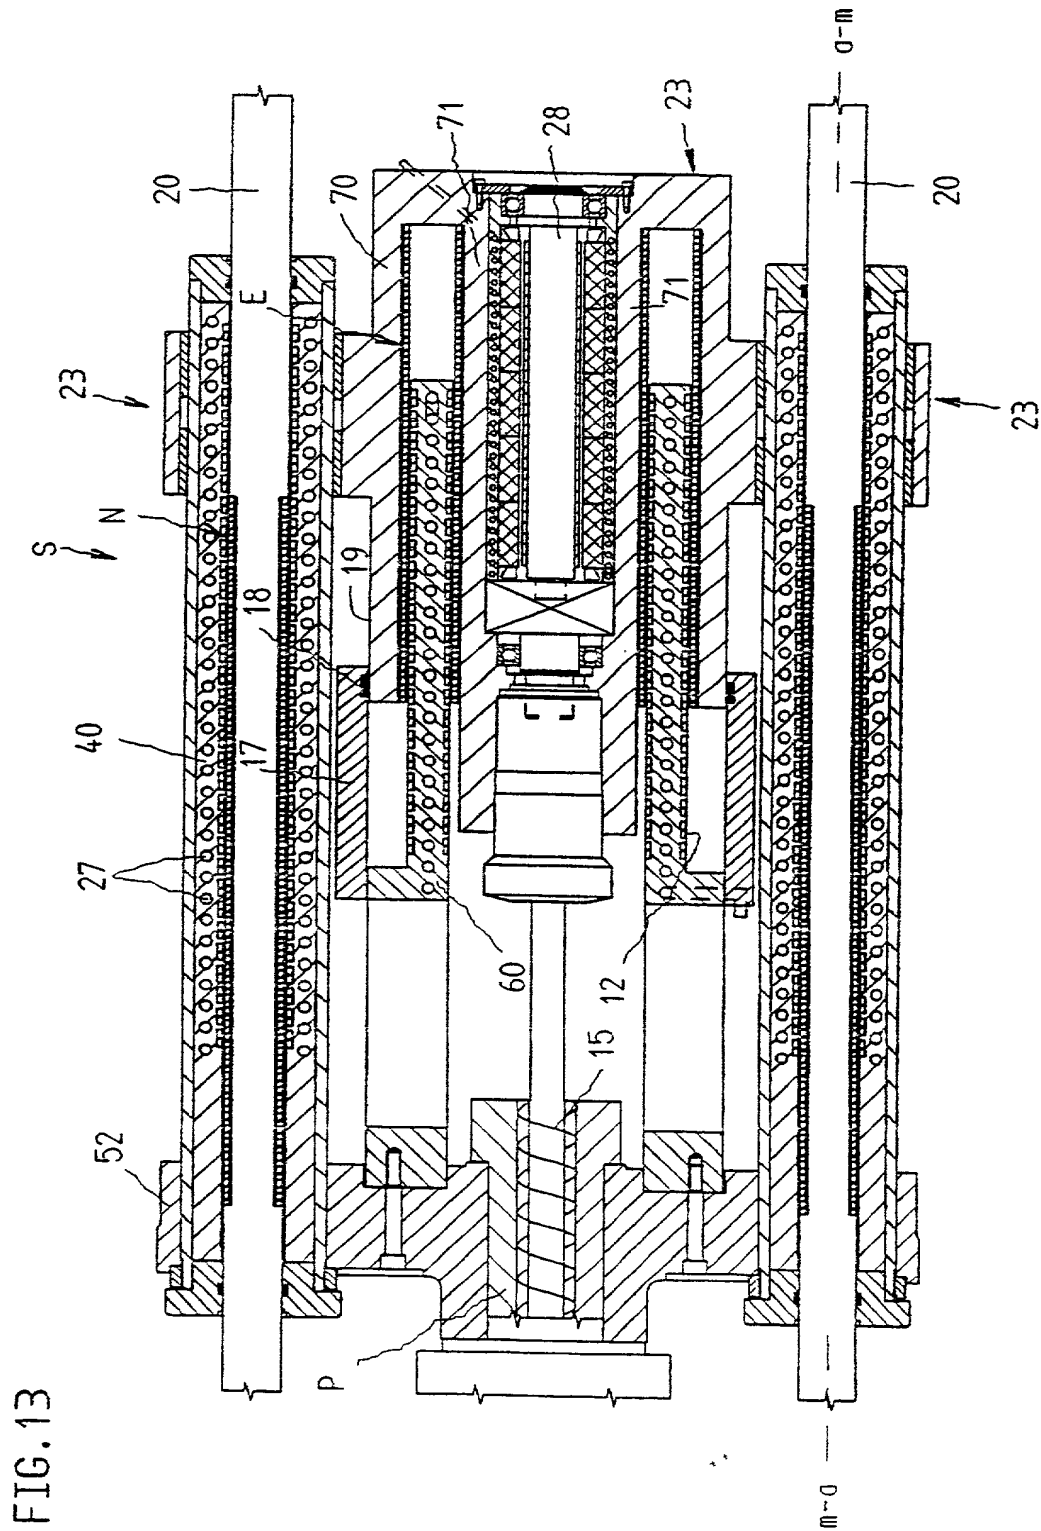


FIG. 14


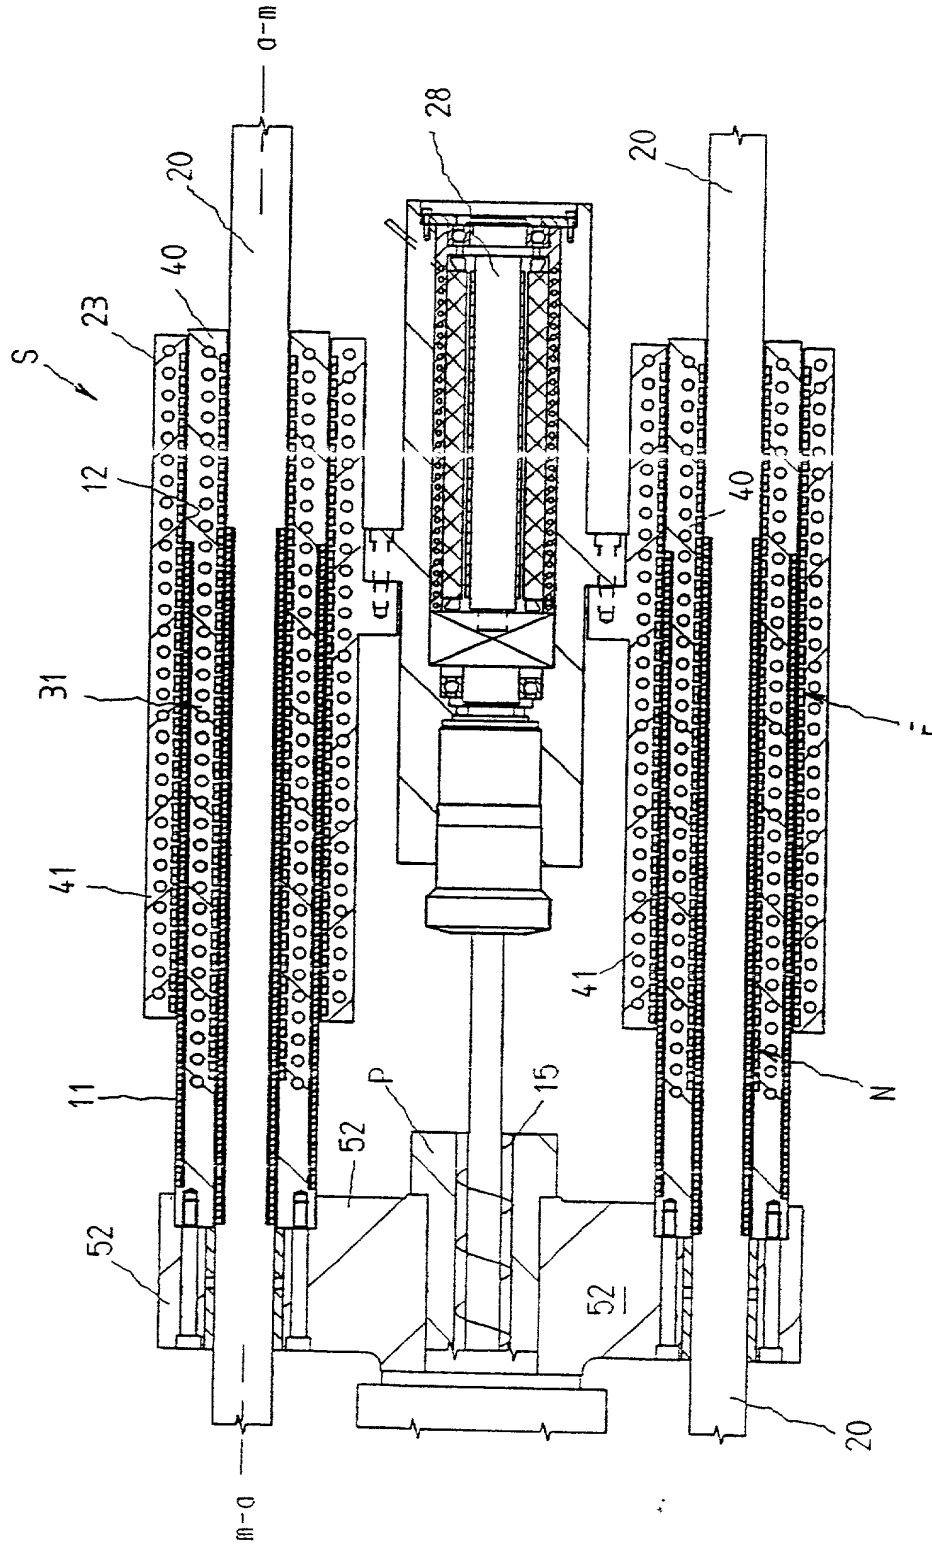


FIG. 15

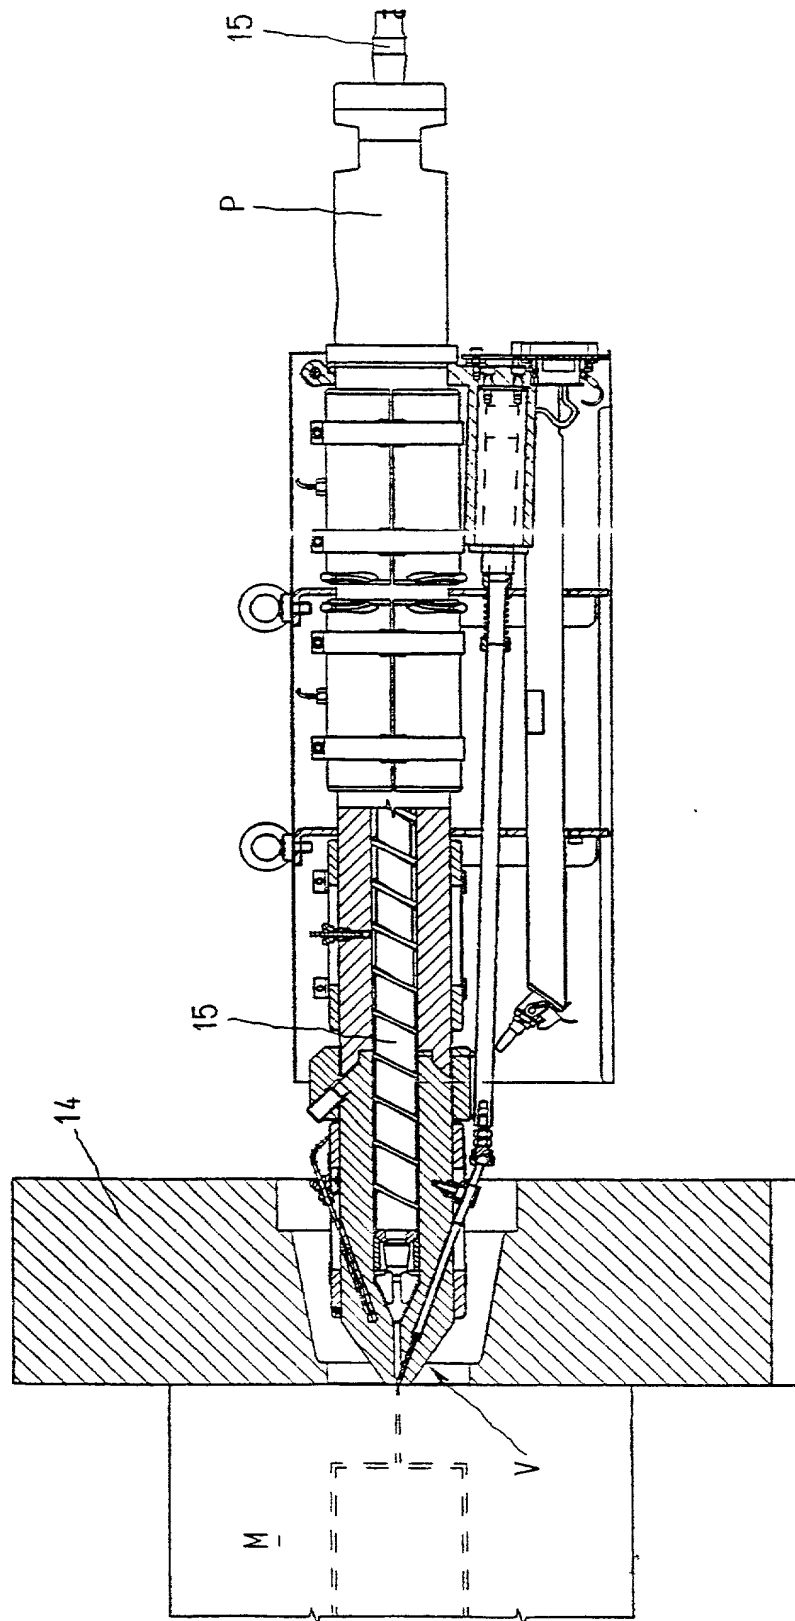

Combined Declaration for Patent Application and Power of Attorney

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name;

I believe that I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

INJECTION MOLDING MACHINE FOR PROCESSING PLASTICS MATERIALS

of which _____, the specification

(check
one)

☐
☒

is attached hereto.

was filed on May 2, 2000 as Application Serial No. PCT/EP 00/03923
and (if applicable) was amended on: November 5, 2001

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, §1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)			Priority Claimed	
199 20 626.0	Germany	05.05.1999	X	
(Number)	(Country)	(Day Month Year Filed)	YES	NO
(Number)	(Country)	(Day Month Year Filed)	YES	NO
(Number)	(Country)	(Day Month Year Filed)	YES	NO
(Number)	(Country)	(Day Month Year Filed)	YES	NO
(Number)	(Country)	(Day Month Year Filed)	YES	NO
(Number)	(Country)	(Day Month Year Filed)	YES	NO

I hereby claim the benefit under Title 35, United States Code, §120 of any United States Application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulation, §1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

(Application Serial No.)	(Filing Date)	(Status: patented, pending, abandoned)
(Application Serial No.)	(Filing Date)	(Status: patented, pending, abandoned)

I hereby appoint the following attorneys, with full power of substitution, association, and revocation, to prosecute this application and to transact all business in the Patent and Trademark Office connected herewith.

Michael A. Cantor - Registration No. 31,152
 Philmore H. Colburn II - Registration No. 35,101
 Keith J. Murphy - Registration No. 33,979
 Leah M. Reimer - Registration No. 39,341
 David A. Fox - Registration No. 38,807
 Edward J. Ellis - Registration No. 40,389
 Michael J. Rye - Registration No. 34,422
 William J. Cass - Registration No. 41,659
 Pamela J. Curbelo - Registration No. 34,676
 Andrew Ryan - Registration No. 43,070
 James F. McLaughlin - Registration No. 38,048
 Gerow D. Brill - Registration No. 34,554
 David S. Fishman - Registration No. 19,758
 Robert J. Feltovic - Registration No. 27,710
 Juan C. Villar - Registration No. 34,271
 Herbert M. Bedingfield, Jr. - Registration No. P44530
 Timothy J. Olson - Registration No. 42,962
 Daniel F. Drexler - Registration No. 47,535



23413

PATENT TRADEMARK OFFICE

ADDRESS ALL CORRESPONDENCE TO:

Philmore H. Colburn II, Esq.
CANTOR COLBURN LLP
55 Griffin Road South
Bloomfield, CT 06002, USA

Telephone: (860) 286-2929 **Facsimile (860) 286-0115**

I hereby further declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application of any patent issued thereon.

Full Name of Sole or First Inventor	Inventor's Signature	Date
Karl Hehl	<i>Karl Hehl</i>	1. Oct. 2001
Residence	Citizenship	
Germany	Germany	
Post Office Address		
Arthur-Hehl-Strasse 32, D-72290 Lossburg, Germany		

DEX